

Specifications\*

Model		CM244GC
Transmission		Hydrostat
Engine	Type	3 cylinder water cooled diesel
	Gross power SAE HP (kW) / DIN HP (kW)	20 (27) / 18 (24)
	Displacement cc	1123
	Rated speed rpm.	2600
	Fuel tank capacity l.	30
Drive	Number of forwards / reverse speed	1 / 1
	Forward speed	0-15
	4-WD	automatic, permanent
	Differential lock	standard
	Steering type	hydrostatic
PTO independent	Cruise Control	standard
	Front pto (mower deck) rpm.	2000
Dimensions	Side pto (blower)	independent selectable
	Length mm.	2330
	Width mm.	1195
	Height mm.	1450
	Gewicht kg.	645
Tires	Wheelbase mm.	1110
	Front	20 x 10.00 - 8
Mower deck	Rear	210 / 60D - 8
	Type mower deck kg	Rear / Mulch
	Cutting width mm.	137
Collector	Number of blades	3
	High dump system	Hydraulic
	Capacity l.	550
	Max. lifting height mm.	1900
Drive ventilator		Axle

\*The specifications are subject to change without notice.



⚠ Important information

• Improper use of any product may cause serious or fatal injury. Read, understand and follow carefully the operating and safety instructions in your owner's manual before using such products.



SHIBAURA EUROPE BV  
Begonialaan 7  
NL - 6851 TE Huissen  
T. 0031 (0)26 326 9999  
F. 0031 (0)26 326 9990  
E. info@shibauro.com  
I. www.shibauro.com

Dealer:

FRONTMOWER WITH COLLECTOR

CM244GC

SHIBAURA








Well-organized dash board:



Mower deck can be flipped up to maintain blade and clean inside deck easily. Excellent cut quality is achieved by a PTO driven 2-blade, which in turn against each other, mowerdeck.

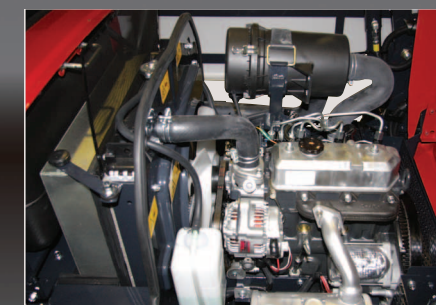

User can reach engine room easily for daily maintenance.



The spacious operator platform provides plenty of foot and leg.



Steering column can be tilted and power steering is standard equipment.



Cruise Control for variable speed setting is included as standard. Two levers for heffen en openen of the collector.



Easily cleaning of the screen for dust-free sucking up of cooling air.